

## CHIPVAC 200 - CHIPVAC 200HV


### Tilting patented vacuum

With a large solid capacity designed to simplify the suction of a wide range of materials, also recovering any liquid.

Possibility of turning upside down - 90° - with the help of a forklift with a patented system. Simple and effective.

Simple material discharge and user-friendly maneuverability.

Sturdy construction

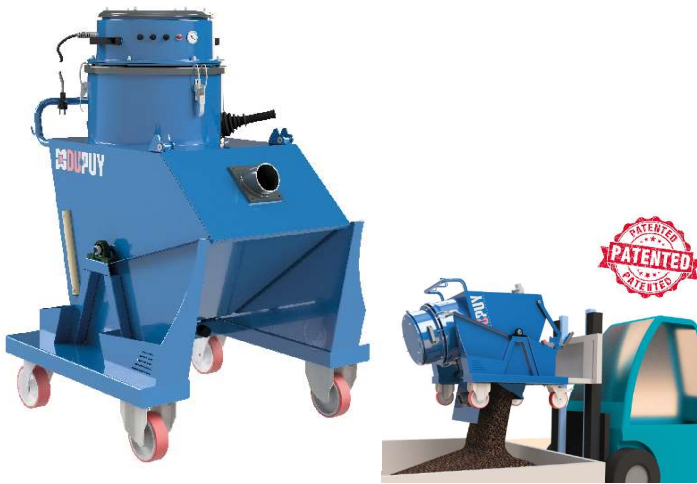

TECHNICAL DATA		CHIPVAC200	CHIPVAC 200HV
Voltage	V - Hz	230 - 60 1~	230 - 60 1~
Power	kW	3,3	3 x 1,3
Waterlift max	.H <sub>2</sub> O	94.48	141.73
Air Flow max	cfm	318	265
Filter surface	in <sup>2</sup>	2,170	2,170
Filter type		Star	
Ø filter	in	18	
Media, class (IEC 60335-2-69) <sup>2</sup>		Polyester - L	
Solids capacity	Gallon	53	
Ø Suction inlet	mm.	80	
Discharge system	Patented	Patented Tilting 90°	
Noise level	dB(A)	78	77
Dimensions	in	43x37x53 H	43x37x54 H
Weight	lbs	342	346

Standard version price	
CHIPVAC 200	CHIPVAC200-001
CHIPVAC 200HV	CHIPVAC200HV-001

Optionals	
Sieve grid for Oil & Chips	SG
Class M Teflon filter Hydro-Oleophobic	TF OWR

Recommended accessory	
Oil&Chips accessory kit	TA.0620.0000
Oil&Chips accessory kit	TA.0622.0000

TA.0620.0000



TA.0622.0000

